


## GB3300 Specification

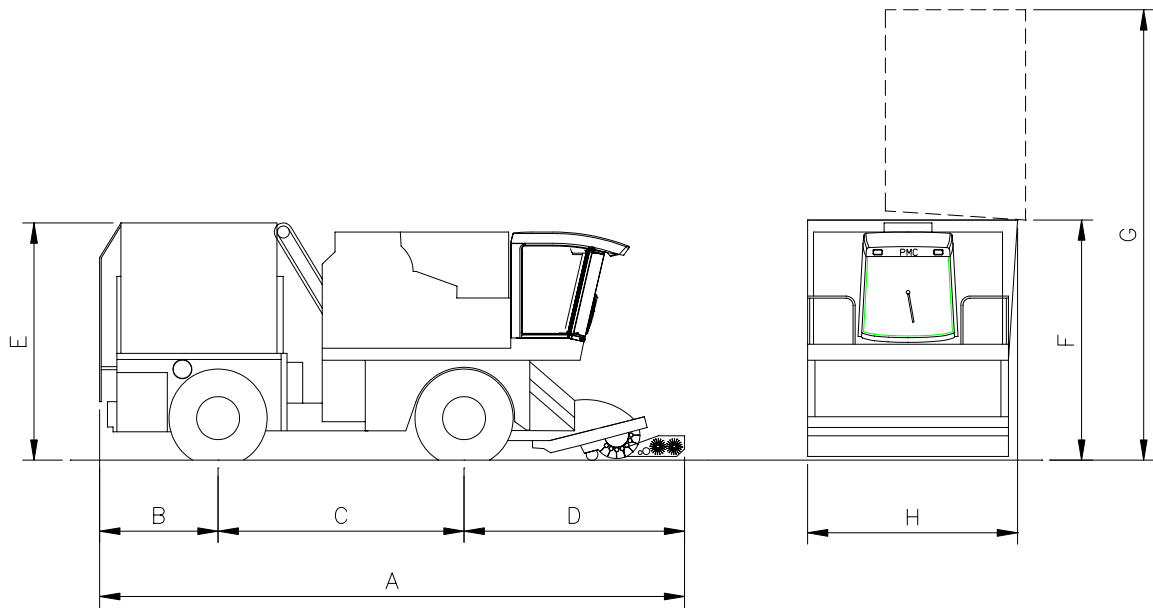

Side & Front elevation of machine

### Main dimensions

Length	A	9900
Overhang	B	2250
Wheel centres	C	4000
Overhang front	D	3650
Height	E	3950
Discharge height		
maximum	F	4200
minimum		3800
Height (max)	G	7500
Width	H	3500

### Weights (on the road)

	kg
Front axle	8620
Rear axle	7480
Total (approx)	16100

### Fluid capacities

Fuel	650 litres
Hydraulic oil	400 litres

### Hopper capacity

Volume	14.4m <sup>3</sup>
Weight of beans	4000-5000kg (approx)

### Tyres

Michelin	750/65R26 MEGAXBIB
Static loaded radius	0.725 m
Rolling circumference	4.811 m
Pressure	2.0 bar

### Engine

Make	Deutz liquid cooled
Type	TCD2013 L06 2V
Power rating	165kW (DIN3046)
Capacity	7.146 litres

### Transmission

Type	Hydrostatic
Pump	Sauer-Danfoss
	90/100 cc/rev
Motors (front)	Poclain S18
Motors (rear)	Poclain S18
Motor displacement	1747/698cc

### Vehicle speeds

Road	25 kph
Field	9.8 kph

*PMC Harvesters pursues a policy of continuous product improvement and reserves the right to change specifications, models and designs without notice or obligation.*